

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
3 June 2004 (03.06.2004)

PCT

(10) International Publication Number
WO 2004/045943 A1

(51) International Patent Classification⁷: B62K 15/00, 5/04

(21) International Application Number:
PCT/NO2003/000389

(22) International Filing Date:
20 November 2003 (20.11.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
20025584 21 November 2002 (21.11.2002) NO

(71) Applicant (for all designated States except US): PETER
OPSVIK AS [NO/NO]; Pilestredet 27 H, N-0164 Oslo
(NO).

(72) Inventor; and
(75) Inventor/Applicant (for US only): OPSVIK, Peter
[NO/NO]; Josefines gate 40, N-0258 Oslo (NO).

(74) Agent: OSLO PATENTKONTOR AS; Postboks 7007 M,
N-0306 Oslo (NO).


(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR,
CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD,
GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR,
KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN,
MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU,
SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (BW, GH,
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE,
SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: MEANS OF PERSONAL TRANSPORT

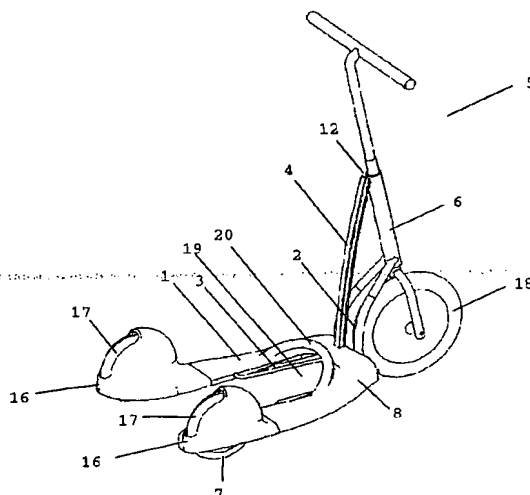

(57) Abstract: The invention relates to a foldable scooter (5) comprising a support device (6) for a steerable front wheel and a rear carriage (1). The carriage is connected to the support device (6) at the front of the carriage (1), which carriage (1) is provided with at least one wheel (7) at the rear. The carriage (1) may be folded against the support device (6) to form a compact unit which may be carried or wheeled. In an expanded position of the scooter, the front of the said carriage (1) abuts a stop face (9) connected to the support device (6). Further, a rigid stay (3) is connected to the carriage (1), which stay (3) is pivotally connected at its first end (10) to a mid-section of the carriage (1) and is pivotally connected at its opposite end (11) to the support device (6).

WO 2004/045943 A1

BEST AVAILABLE COPY